



# Washer Assembled Hex Socket Head Cap Screws

Material: SUS316L, Standard Type



RoHS 10


Reference Value Tensile Failure Load

M	(N)
3	3,400
4	6,900
5	12,100
6	15,500
8	32,200


ⓘ Values are not guaranteed.

M × Pitch	A	E	B	C	D	t	(a) Max	Through Hole (d)
3 × 0.5	5.5	3	2.5	5.5	7	0.5	3	1.2
4 × 0.7	7	4	3	7	9	0.8	4.4	1.5
5 × 0.8	8.5	5	4	8.5	10	1.0	5.4	1.5
6 × 1.0	10	6	5	11.5	12.5	1.5	6.9	2.0
8 × 1.25	13	8	6	14.5	17	1.5	8.4	2.0

SSCBS

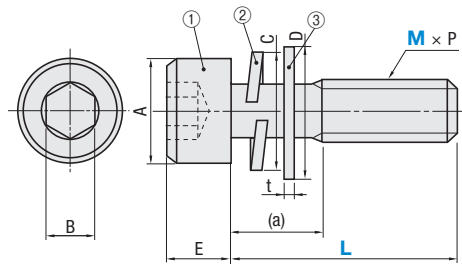

SSCBAS

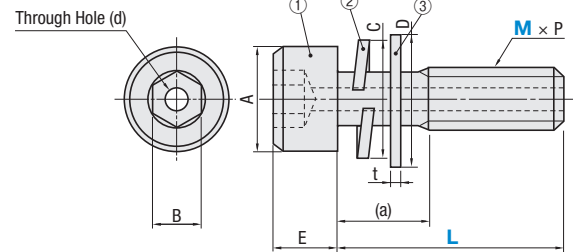

Part	Material	Base Material Strength Class
① Screw	316L Stainless Steel	A4-70
② Spring Washer	316L	-
③ Flat Washer	Stainless Steel	-

- ⓘ For M5, M6 or M8 screws, "316L" is engraved on head.
- ⓘ For M3 and M4 screws, only a "\*" mark is engraved.

Part Number	
Type	M-L
SSCBS Standard	3- 6
	8
	10
	12
	16
	4- 8
	10
	12
	16
	20
SSCBAS With Through Hole	5- 10
	12
	16
	20
	6- 10
	12
	16
	20
	25
	30
60	
	8- 15
	20
	25
	30

Part Number Example	Part Number		
	Type	M	L
	SSCBS	4-	16
	SSCBAS	6-	60