



MISUMI
C-VALUE


Rolled Ball Screws Standard Nut - Shaft Dia. 25; Lead 5, 10, 25 (C-BSSCH(K), C-BSSTH(K))
Accuracy Grade C7, C10

For how to select Ball Screws, see P. 2285

Points of comparison between similar products


Load rating and nut dimensions of C-VALUE products are different from those of similar products. (For details, see P. 759 to P. 760.) When opting for C-VALUE products, select them by comparing specifications of similar products.

Similar Product Pages P. 759 - P. 760




Nut Type	Type		Accuracy Grade	Shaft Dia.	Lead	Screw Shaft			Nut		
	Standard	F, P Configurable				Material	Hardness	Surface Treatment	Material	Hardness	Surface Treatment
Standard Nut	C-BSSTH	C-BSSTHK	C7	25	5, 10, 25	1055 Carbon Steel	Induction Hardened 58 to 62 HRC		SCM415 Alloy Steel (JIS)	Carburized 58 to 62 HRC	
	C-BSSCH	C-BSSCHK	C10								


C-BSSTH(K), C-BSSCH(K) 2505

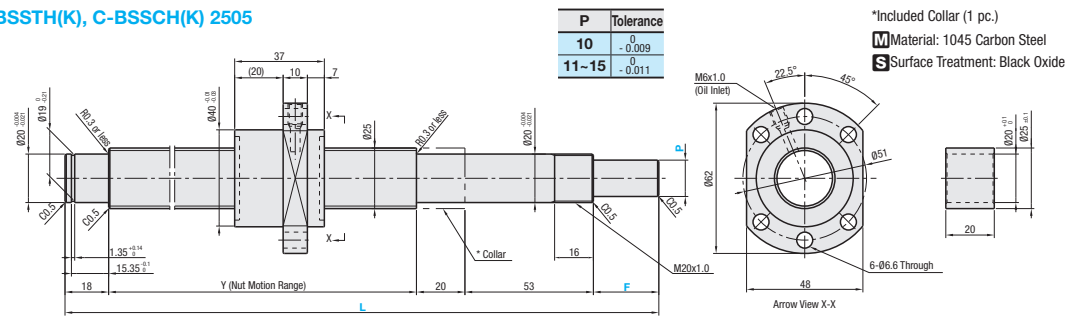

C-BSSTH(K), C-BSSCH(K) 2510

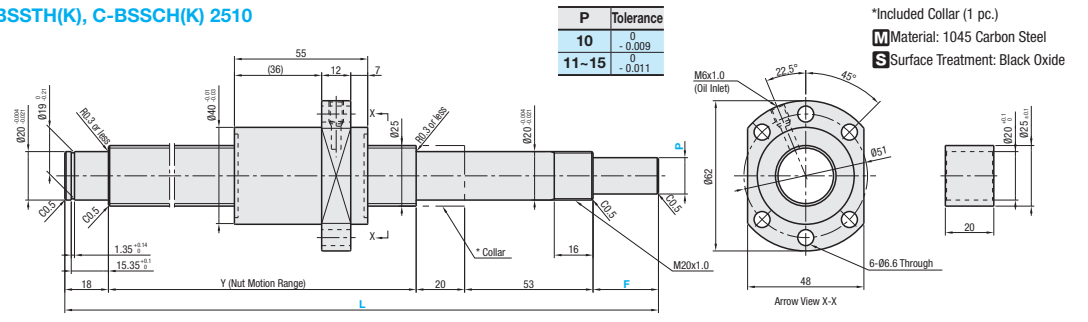

C-BSSTH(K), C-BSSCH(K) 2525

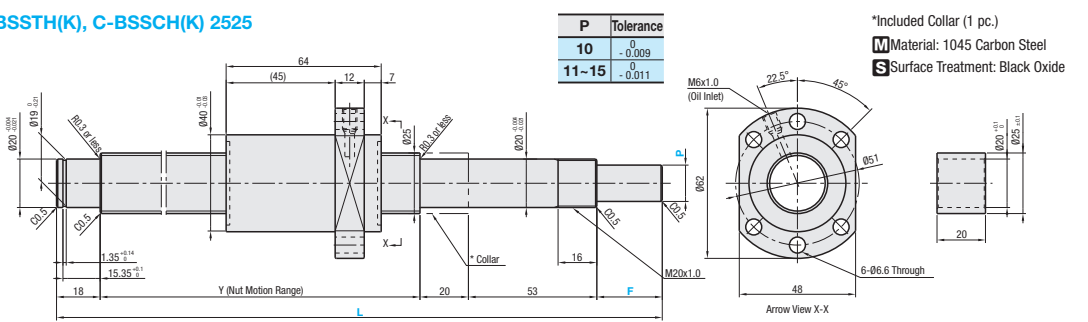

Nut Type	Accuracy Grade	Part Number		1 mm Increments			Ball Dia.	Ball Center Dia.	Screw Root Dia.	Number of Circuits	Basic Load Rating		Axial Play	Twisting Direction				
		Type	Screw Shaft O.D.	L	*F	*P					C (Dynamic) kN	Co (Static) kN						
Standard Nut	C7	C-BSSTH	25	5	200-2000	27	15	L - 118	3.175	26.08	(22.905)	3.8 turns, 1 row	4.6	13.1	0.10 or less	Right		
						C-BSSTHK	27-45	10-15									L - (91 + F)	
						C-BSSCH	27	15									L - 118	
						C-BSSCHK	27-45	10-15									L - (91 + F)	
						C7	C-BSSTH	27									15	L - 118
						C-BSSTHK	27-45	10-15									L - (91 + F)	
	C10	C-BSSTH	25	10	300-2000	27	15	L - 118	1.8 turns, 1 row	6.5	15.9	0.10 or less	0.12 or less					
						C-BSSTHK	27-45	10-15						L - (91 + F)				
						C-BSSCH	27	15						L - 118				
						C-BSSCHK	27-45	10-15						L - (91 + F)				
						C7	C-BSSTH	27						15	L - 118			
						C-BSSTHK	27-45	10-15						L - (91 + F)				

*F and P are configurable for C-BSSCHK and C-BSSTHK only. *F ≤ P x 3 *Y (Nut Motion Range) > (Nut Overall Length) kgf = N x 0.101972

Nut Type	Accuracy Grade	Part Number	JPY Unit Price: 1 to 4 pc(s).					
			L200-400	L401-600	L601-800	L801-1000	L1001-1200	L1201-1500
Standard Nut	C7	C-BSSTH2505						
	C10	C-BSSCH2505						
	C7	C-BSSTH2510						
	C10	C-BSSCH2510						
	C7	C-BSSTH2525						
	C10	C-BSSCH2525						

For the price of F, P Configurable Type, add JPY2,080 to the standard type price. E.g.) C-BSSCHK2505 - 300 - F30 - P12 → JPY16,240 + JPY2,080 = JPY18,320


Ordering Example

Part Number - L - F - P

C-BSSCH2505 - 400

C-BSSCHK2510 - 860 - F30 - P12

- Notes
- Filled with lithium soap based grease (Alvania Grease S2 made by Showa Shell Sekiyu K.K).
 - For accuracy of Ball Screws, see P. 612 and P. 614.
 - For details of Support Units, see P. 653 to P. 668.
 - Caution: Do not let the nuts overrun or remove the nuts from the screw shafts. It may cause the balls to fall out or damage the ball recirculation parts.
 - The collar included with this product should be installed in the same position as indicated on the drawing by "Collar." The collar included with the Support Unit product should be installed and tightened on the nut side of the ball screw.
 - Note that, when a ball screw shaft or ball screw nut is tilted, it may fall out due to its own weight.

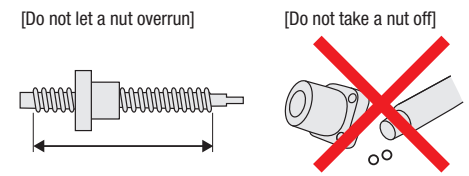

Alterations


Part Number - L - F - P - (FC, KC...etc.)

C-BSSCH2505 - 680 - KC10

Alterations	Code	Spec.
No Machining on Both Shaft Ends (Annealing Range) 4-C Nut	WNC	Does not machine any of the both shaft ends. Ordering Code WNC-S20-F80 Annealing may lower hardness on the annealed area + 25 mm fore and aft. S + F ≤ L/2 L - (S + F) ≤ Y + 50 On the annealed area + 25 mm fore and aft, axis run-out may be larger than indicated by the catalog standard.
No Machining on Support Side Shaft End	NC	No machining added on the support side shaft end. Ordering Code NC
Ball Nut Orientation Reversed (Support Side) (Fixed Side)	RLC	Changes the nut direction. Ordering Code RLC
No Retaining Ring Groove on Support Side Shaft End	RNC	No retaining ring groove is machined on the support side shaft end. Ordering Code RNC *Combination with FC is not available.
Change Support Side Shaft End Machining	GC	Changes the machining on the support side. G is selectable from 10, 12, 15 or 20. G = 1 mm Increments Ordering Code GC - 010 - G20 5 ≤ G ≤ 0 x 3 *Y dimension is shortened. No Retaining Ring Groove *Combination with FC is not available.
Change Support Side Shaft End Length	FC	Changes the length of the support side shaft end. FC = 1 mm Increments Ordering Code FC20 19 ≤ FC ≤ 60 Y dimension is shortened. Combination with GC is not available.
Tapped Hole on Support Side Shaft End	MC	Adds a tapped hole on the support side shaft end. MC = 1 mm Increments Ordering Code MC40 M 2 M8 x 1.25 20 28 ≤ MC ≤ 60

Alterations	Code	Spec.
Wrench Flats on Fixed Side	SZC	Adds wrench flats on the fixed side shaft end. Ordering Code SZC Ball bearings will fall out if the ball nut crosses the wrench flats.
Keyway on Fixed Side Shaft End Detailed Keyway Dimensions P. 614	KC	Adds a keyway on the fixed side shaft end. KC = 1 mm Increments Ordering Code KC20 5 ≤ KC ≤ P x 3, KC ≤ F - 1
Keyway on Fixed Side Shaft End	KLC	Adds a keyway at a customer specified area on the fixed side shaft end. (Keyway dim. is same as that of KC.) K, S = 1 mm Increments Ordering Code KLC - K20 - S3 6 ≤ K + S ≤ P x 3, K + S ≤ F - 1
Flat Machined on Fixed Side Shaft End	SC	Adds a flat on the fixed side shaft end. SC = 1 mm Increments Ordering Code SC20 5 ≤ SC ≤ P x 3, SC ≤ F - 1
2 Flats Machined on Fixed Side Shaft End	SWC, SGC	Adds two flats on the fixed side shaft end. SWC: 90° Position, SGC: 120° Position 1 mm Increments Ordering Code SWC10 5 ≤ SWC/SGC ≤ P x 3, SWC/SGC ≤ F - 1
Installing Special Temporary Shaft Temporary Shaft	TAS	Special Temporary Shafts suitable with Ball Screws are installed. When removing Nut from Screw Shaft, always use Special Temporary Shaft. For installation method, see P. 701.

Peripherals: Combination with the following parts is available.

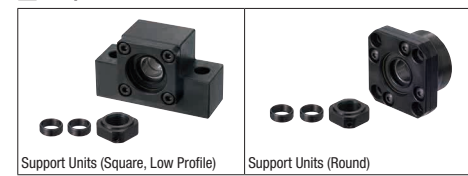

Nut Brackets for C-Value Ball Screws are not available.

Combination with Support Units

Type	Ball Screw Part Number		Recommended Support Unit					
	Screw Shaft O.D.	Lead	Part Number Type	No.	Shape	Fixed Side	Support Side	Page
C-BSSCH C-BSSTH	25	05 10 25	C-BSW	20	Square	○	○	P. 781
			C-BUN					P. 782
			C-BRW		Round	○	○	P. 787
			C-BUR					P. 788

Other than the part numbers shown above, a rich variety of Support Units are also available. (P. 659 - P. 668)