


Shaft Supports (Flanged Mount Type with Slit)

Standard / Long Sleeve Type

Type	Round Flanged	Square Flanged	Compact Flanged	Material	Surface Treatment	Accessories
Standard	STHWRB	STHWSB	STHWCB	1045 Carbon Steel or Equivalent	Black Oxide	Hex Socket Head Cap Screw 1 pc.
	STHWR	STHWS	STHWC		Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
	SSTHWR	SSTHWS	SSTHWC	304 Stainless Steel	—	—
Long Sleeve	STHWRBL	STHWSBL	STHWCBL	1045 Carbon Steel or Equivalent	Black Oxide	Hex Socket Head Cap Screw 2 pcs.
	STHWRLL	STHWSLL	STHWCLL		Electroless Nickel Plating	Hex Socket Head Cap Screw 2 pcs. (Stainless Steel)
	SSTHWRLL	SSTHWSLL	SSTHWCLL	304 Stainless Steel	—	—

Standard with Through Mounting Holes

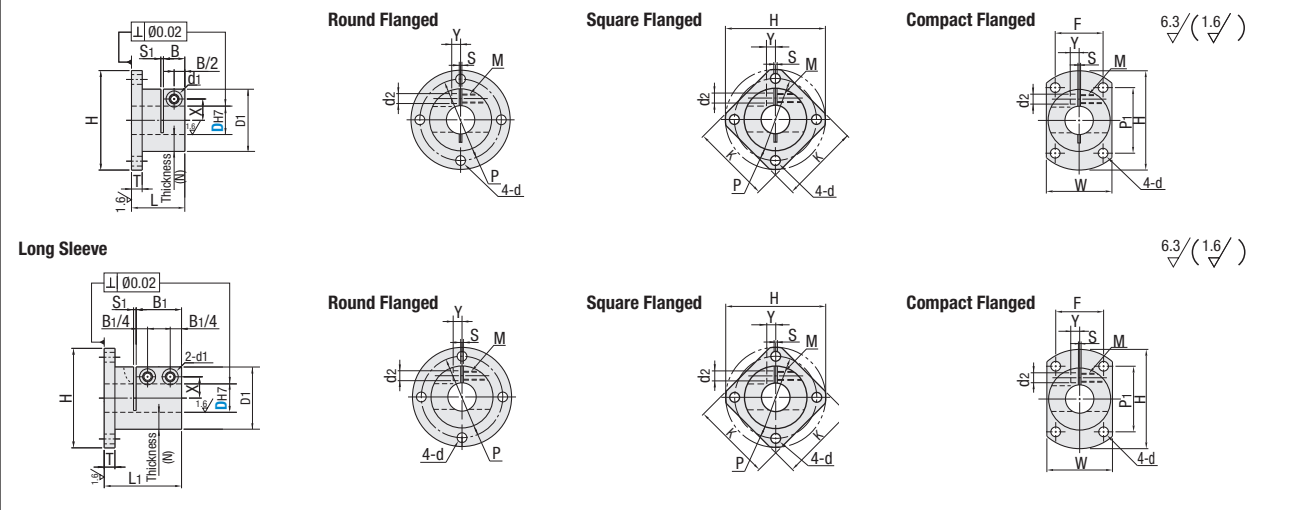

Part Number		Sleeve Thickness (N)	L	L ₁	D ₁	H	T	B	B ₁	P	K	W	P ₁	F	d	S	S ₁	X	Y	d ₁	d ₂	M	Included Screw M x Length	
Type	D _{H7}																							
Standard	8	+0.015 0	8.5	18	—	25	39	5	10	—	32	30	27	25	20	3.5	1.5	7.5	3.5	7.5	4.6	M4	M4 x 10	
	8M																						4.5	M4 x 10
	10	+0.018 0	10	20	30	49	6	12	—	42	40	34	35	25	4.5	1.5	11	4	9	5.6	M5	M5 x 12		
	*12																					22	33	32
	13	+0.018 0	9.5	24	—	32	52	6	12	—	46	44	37	37	27	5.5	1.5	12	5	9	5.6	M5	M5 x 12	
	*16																						10	27
	Long Sleeve	*20	+0.021 0	10	32	48	40	64	8	15	30	67	60	57	50	45	6.6	2	14	6	12	6.6	M6	M6 x 20
		*25																						38
		*30	+0.025 0	12.5	40	60	55	79	10	18	36	87	81	76	67	55	9	2	20	10	12	6.6	M6	M6 x 20
		*35																						48
		*40	+0.025 0	15	55	82.5	70	104	12	22	44	102	94	91	82	60	9	2	26	13	14	9	M8	M8 x 26
		*50																						17.5
																								M10 x 32

Ⓢ Long Sleeve Type is available only for D dimension denoted with * mark.



Shaft Supports (Flanged Mount Type with Slit)

With Pilot / With Dowel Hole

Feature: Easy positioning during assembly.

Type	Round Flanged	Compact Flanged	Material	Surface Treatment	Accessories
Flanged Mount Slit – With Pilot	STHWIRB	STHWICB	1045 Carbon Steel or Equivalent	Black Oxide	Hex Socket Head Cap Screw 1 pc.
	STHWIR	STHWIC		Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
	SSTHWIR	SSTHWIC	304 Stainless Steel	—	—

Part Number	Type	D _{H7}	Sleeve Thickness (N)	L ₁	D ₁	H	T	B	P	W	P ₁	F	d	S	S ₁	X	Y	d ₁	d ₂	M	Included Screw M x Length	Available Types					
																						Round Flanged	Compact Flanged				
Round Flanged	8	+0.015 0	8.5	23	25	39	5	10	—	32	27	25	20	3.5	1.5	7.5	3.5	7.5	4.6	M4	M4 x 10	•	•	•	•	•	•
	8M																					4.5	•	•	•	•	•
	10	+0.018 0	10	25	30	49	6	12	—	40	32	33	23	4.5	1.5	10	3	9	5.6	M5	M5 x 10	•	•	•	•	•	•
	12																					28	32	52	12	42	34
	15	+0.018 0	10	33	35	56	6	12	—	46	37	37	27	5.5	1.5	12	5	9	5.6	M5	M5 x 12	•	•	•	•	•	•
	16																					9.5	36	35	56	12	46
Compact Flanged	20	+0.021 0	10	40	40	64	8	15	—	52	42	43	30	6.6	2	14	6	12	6.6	M6	M6 x 20	•	•	•	•	•	•
	25																					46	45	69	15	57	47
	30	+0.025 0	12.5	50	55	79	10	18	—	67	57	50	45	9	1.5	20	10	12	6.6	M6	M6 x 20	•	•	•	•	•	•
	40																					15	67	70	104	12	18

Flanged Mount Slit – Dowel Hole

Type	Round Flanged	Compact Flanged	Material	Surface Treatment	Accessories
Flanged Mount Slit – Dowel Hole	STHWRBK	STHWCBK	1045 Carbon Steel or Equivalent	Black Oxide	Hex Socket Head Cap Screw 1 pc.
	STHWRK	STHWCK		Electroless Nickel Plating	Hex Socket Head Cap Screw 1 pc. (Stainless Steel)
	SSTHWRK	SSTHWCK	304 Stainless Steel	—	—

Part Number	Type	D _{H7}	Sleeve Thickness (N)	L	D ₁	H	T	B	P	W	P ₁	F	d	S	S ₁	X	Y	d ₁	d ₂	Q	M	Included Screw M x Length	
Round Flanged	12	+0.018 0	10	22	32	52	6	10	42	34	35	25	4.5	1.5	11	4	9	5.6	5	4	M5	M5 x 12	
	16																					9.5	30
Compact Flanged	20	+0.021 0	10	32	40	64	8	15	—	52	42	43	30	6.6	2	14	6	12	6.6	M6	M6 x 20	•	•
	25																					38	45
	30	12.5	40	55	79	10	18	—	67	57	50	45	9	1.5	20	10	12	6.6	6	M6	M6 x 20	•	•

