

Couplings

High Positioning Accuracy / High Rigidity Disc Clamping


For Servo Motors

⚠ The stainless steel discs of this product have sharp edges that may cause injuries. Use of thick protective gloves is recommended.

Couplings – High Positioning Accuracy




SCXW (Double Disc Type)

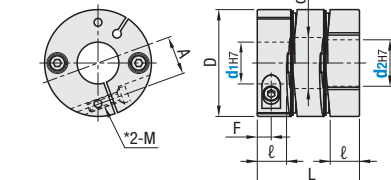

- ① Tolerance values for d1, d2, are applied before slit is machined.
- ② The lateral, angular, and axial misalignment values shown are for each occurring individually. When more than one misalignments are occurring simultaneously, the allowable maximum value of each will be reduced by 1/2.
- ③ For the selection criteria and alignment procedures, see P.1091, 1093.

SCXWK (Double Disc – Keywayed Bore) (Keywayed Bore d1, d2)

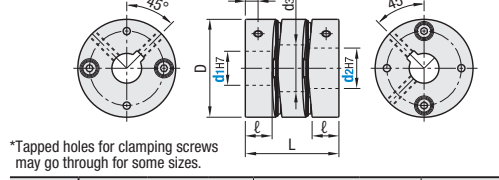

*Tapped holes for clamping screws may go through for some sizes.

Type	Material			Surface Treatment			Accessories
	Body	Disc	Screw	Body	Disc	Screw	
SCXW	Aluminum Alloy	Stainless Steel	4137 Alloy Steel	Clear Anodize	—	Trivalent Chromate	Hex Socket Head Cap Screw, Set Screw
SCXWK	Aluminum Alloy	Stainless Steel	4137 Alloy Steel	Clear Anodize	—	Trivalent Chromate	Hex Socket Head Cap Screw, Set Screw


Part Number	Type	No.	d1, d2 (d1=d2)																	Clamp Screw						
			① Only the dimensions marked with * are selectable for Keywayed Bore Type																	M	Tightening Torque (N-m)					
Double Disc Type SCXW	21	4	5	6	8*													21	9.5	24.5	7	3.5	3	7	M2.6	1.2
	28		5	6	8*	10*													28	12	32	9	4	4	9.5	M3
Double Disc Type Keywayed Bore SCXWK	34		6	8*	10*	12*	14*											34	17	35	9.8	5	4.5	12	M3	1.5
	46		8	10*	12*	14*	15	17	19								46	22	44	12.6	6	6	16.5	M4	3.5	
	55		12	14	15	17	19	20	22	24	25						54.5	26	55	16	7	—	20.5	M5	7	

④ SCXWK not available for No. 55.

⑤ Static torsional spring constant, inertia moment, and mass values are for cases of maximum shaft diameter.

Part Number	Type	No.	Allowable Torque (N-m)	Ang. Misalign. (°)	Lat. Misalign. (mm)	Static Torsional Spring Const. (N-m/rad)	Max Rot. Speed (r/min)	Moment of Inertia (Kg-m ²)	Allowable Axial Misalign. (mm)	Comp. Factor	Mass (g)
21	SCXW SCXWK	21	1.2	1.0	0.10	900	10000	1.20 x 10 ⁻⁶	±0.20	1.5	18
28		1.6	1.2	0.15	3600	4.68 x 10 ⁻⁶		42			
34		4.0	1.5	0.25	5700	1.10 x 10 ⁻⁵		65			
46		10.0			14500	4.70 x 10 ⁻⁵		151			
55		25.0			23000	1.19 x 10 ⁻⁴		260			

Keyway Dimension




Shaft Bore Dia. d1, d2	Dim.	Tol.	Dim.	Tol.	Key Nominal Dim. b x h	Set Screw Size	Tightening Torque (N-m)
8, 10	3	±0.0125	1.4	+0.1	3 x 3	M2	0.3
12	4	±0.0150	1.8	0	4 x 4	M3	0.7
14	5	±0.0150	2.3	0	5 x 5	M4	1.7

Highly suitable for applications requiring high speeds and high positioning accuracies, such as ball screw drives.


Couplings – High Rigidity Disc Clamping



SCPW (Double Disc Type)



SCPS (Single Disc Type)



- ① Tolerances for d1, d2, are values before slit machining.
- ② The lateral, angular, and axial misalignment values shown are for each occurring individually. When more than one misalignments are occurring simultaneously, the allowable maximum value of each will be reduced by 1/2.
- ③ For the selection criteria and alignment procedures, see P.1091, 1093.
- *Tapped hole for clamp screw might go through for some sizes.

Type	Material			Surface Treatment			Accessories
	Body	Disc	Screw	Body	Disc	Screw	
SCPW	Aluminum Alloy	Stainless Steel	4137 Alloy Steel	Clear Anodize	—	Black Oxide	Hex Socket Head Cap Screw
SCPS	Aluminum Alloy	Stainless Steel	4137 Alloy Steel	Clear Anodize	—	Black Oxide	Hex Socket Head Cap Screw

Part Number	Type	No.	d1, d2 select (must be d1=d2)																	Clamp Screw						
																				M	Tightening Torque (N-m)					
Double Disc Type SCPW	16	*3	4	5	6													16.6	6.5	23	16.6	7.2	3	5.3	M2.6	1.0
	21		4	5	6	8	9											21	9.5	24.5	16.7	7	3.5	7	M2.6	1.2
Single Disc Type SCPS	28		5	6	8	9	10											28	12	32.2	21.5	9	4	9.5	M3	1.5
	34		6	8	9	10	11	12	14								34	15	35	23.3	9.8	5	12	M3	1.5	
	46		8	9	10	11	12	14	15	17	19						46	22	44	29.8	12.6	6	16.5	M4	3.5	
	55		12	14	15	17	19	20	22	24	25						54.5	26	55	37.2	16	7	20.5	M5	6.0	

④ For * marked d1, d2, use with the load torque 60% or less than shown in the table to prevent slipping.

Double Discs Type (High Rigidity Type)

Part No.	Type	No.	Allowable Torque (N-m)	Angular Misalign. (°)	Lateral Misalign. (mm)	Static Torsional Spring Constant (N-m/rad)	Max Rot. Speed (r/min)	Moment of Inertia (Kg-m ²)	Allowable Axial Misalign. (mm)	Comp. Factor	Mass (g)
16	SCPW	16	1.0	1.0	0.10	500	10000	4.22 x 10 ⁻⁷	±0.20	1.5	11
21		1.2	800			1.11 x 10 ⁻⁶		17			
28		1.6	3000			4.68 x 10 ⁻⁶		42			
34		4.0	4800			1.10 x 10 ⁻⁵		65			
46		10.0	11500			4.70 x 10 ⁻⁵		151			
55	25.0	19000	1.19 x 10 ⁻⁴	260							

⑤ Static torsional spring constant, inertia moment, and mass values are for cases of maximum shaft diameter.

Single Disc Type (High Rigidity Type)

Part No.	Type	No.	Allowable Torque (N-m)	Ang. Misalign. (°)	Static Torsional Spring Constant (N-m/rad)	Max Rot. Speed (r/min)	Moment of Inertia (Kg-m ²)	Allowable Axial Misalign. (mm)	Comp. Factor	Mass (g)
16	SCPS	16	1.0	1.0	1000	10000	3.16 x 10 ⁻⁷	±0.10	1.5	8
21		1.2	1700		7.90 x 10 ⁻⁷		12			
28		1.6	6000		3.24 x 10 ⁻⁶		30			
34		4.0	8000		7.60 x 10 ⁻⁶		45			
46		10.0	20000		3.23 x 10 ⁻⁵		105			
55	25.0	33000	8.19 x 10 ⁻⁵	180						

⑥ Single Disc Type cannot tolerate lateral misalignment.

Part Number Example	Part Number	Shaft Bore Dia. d1	Shaft Bore Dia. d2
SCXW46	10	14	
SCXWK46	12	14	
SCPW34	8	12	

Application Example	Part Number	Shaft Bore Dia. d1	Shaft Bore Dia. d2
Highly suitable for applications requiring high speeds and high positioning accuracies, such as ball screw drives.	MCSLC40	10	15
	MCSSCW32	8	10

Couplings


Ultra High Torque Disc Clamping

For Servo Motors


Couplings – Ultra High Torque Disc Clamping



MCSLC (Standard Bore)

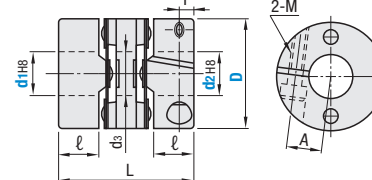


MCSSC (Standard Bore)

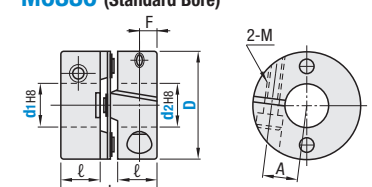


MCSLCLK (Keywayed Bore d1)

MCSLCRK (Keywayed Bore d1)

MCSLCWK (Keywayed Bore d1, d2)

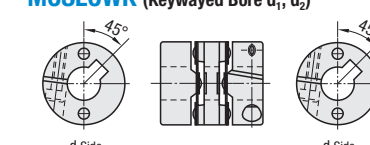

MCSSCWK (Keywayed Bore d1, d2)

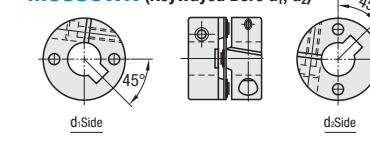

RoHS 10

① Tolerance values for d1, d2, are applied before slit is machined.

② The lateral, angular, and axial misalignment values shown are for each occurring individually. When more than one misalignments are occurring simultaneously, the allowable maximum value of each will be reduced by 1/2.

③ For the selection criteria and alignment procedures, see P.1091, 1093.

Standard Bore	Keywayed Bore				Material		Surface Treatment		Accessories
	d1 (One Side)	d2 (One Side)	d1, d2 (Both Sides)	Body	Disc	Body	Disc		
MCSLC	MCSLCLK	MCSLCRK	MCSLCWK	Aluminum Diecast	Stainless Steel	Electroless Nickel Plating	Hex Socket Head Cap Screw		
MCSSC	MCSSCWK	MCSSCWK	MCSSCWK	Aluminum Diecast	Stainless Steel	Electroless Nickel Plating	Hex Socket Head Cap Screw		

④ For keyway dimension, refer to the following.

Part Number	Type	D	d1, d2 Selection (must be d1=d2)																	Clamp Screw							
			① Keywayed Bore Type is selectable for diameter 6 or larger																	M	Tightening Torque (N-m)						
Clamping	16		*4	5	6													6.8	23.2	7	5	3	M2.5	1			
	20		*4	5	6	6.35	7	8											8.1	26	7.5	6.5			3.7		
	MCSLC	25		*5	6	6.35	7	8	9.53	10								10.4	30.2	9	8.5	4			M3	1.7	
	MCSLCLK	32							8	9.53	10	11	12	14					15	41	12.4	10			6	M4	2.5
	MCSLCRK	40																	19.5	47	15.5	13.1			7.8	M5	7
	MCSLCWK	50																	25	53	18	16.7			9	M6	12

Part Number	Type	D	d1, d2 Selection (must be d1=d2)																	Clamp Screw						
			① Keywayed Bore Type is selectable for diameter 6 or larger																	M	Tightening Torque (N-m)					
Clamping	16		*4	5	6													16.5	7	5	3	M2.5	1			
	20		*4	5	6	6.35	7	8											18.4	7.5	6.5			3.7		
	MCSSC	25		*5	6	6.35	7	8	9.53	10								21.6	9	8.5	4			M3	1.7	
	MCSSCWK	32							8	9.53	10	11	12	14					29	12.4	10			6	M4	2.5
		40																	35	15.5	13.1			7.8	M5	7
		50																	41	18	16.7			9	M6	12

② When d1, d2 is *4, *5, use with load torque 50% or less than shown in the table to prevent slipping.

Characteristic Values

Part Number	Type	D	Allow. Torque (N-m)	Angular Misalign. (°)	Lateral Misalign. (mm)	Static Torsional Spring Constant (N-m/rad)	Max Rot. Speed (r/min)	Moment of Inertia (kg-m ²)	Allowable Axial Misalign. (mm)	Comp. Factor	Mass (g)
MCSLC	16	0.9	2	0.15	0.2	450	6000	2.7 x 10 ⁻⁷	±0.2	5-10	10
MCSLCLK	20	1.3				700	5500	8.0 x 10 ⁻⁷			16
MCSLCRK	25	2.8				950	5000	2.5 x 10 ⁻⁶			30
MCSLCWK	32	5				1100	4000	6.6 x 10 ⁻⁶			62
	40	9				2800	3800	1.9 x 10 ⁻⁵			110
	50	16	3400	3500	5.0 x 10 ⁻⁵	220					

Part Number	Type	D	Allow. Torque (N-m)	Angular Misalign. (°)	Lateral Misalign. (mm)	Static Torsional Spring Constant (N-m/rad)	Max Rot. Speed (r/min)	Moment of Inertia (kg-m ²)	Allowable Axial Misalign. (mm)	Comp. Factor	Mass (g)
MCSSC	16	0.9	1	—	—	650	6000	2.2 x 10 ⁻⁷	±0.1	5-10	8
MCSSCWK	20	1.3				950	5500	7.0 x 10 ⁻⁷			13
	25	2.8				1300	5000	2.2 x 10 ⁻⁶			24
	32	5				1400	4000	5.6 x 10 ⁻⁶			53
	40	9				3300	3800	1.5 x 10 ⁻⁵			90
	50	16	4000	3500	3.9 x 10 ⁻⁵	180					

③ Single disc type cannot tolerate lateral misalignment.

④ For selection criteria and alignment procedures P.1091, 1093.

Part Number
