

Conveyor Chute

Features: Chutes with their angle adjustable between 5 to 60 degrees. Plastic type is also available to make the workpiece move smoother and to prevent scratching of the workpiece.




RoHS 10


Type		Material	Allowable Load (kgf)	Thickness (t)
Angle Adjustable	30° Angle-Fixed			
CSHWS	CSHYS	304 Stainless Steel	15	1.5
CSHWE	CSHYE	304 Stainless Steel + Stainless Steel Sliding Plate*		1.5 + 0.8 (Sliding Plate Thickness)
CSHWU	CSHYU	304 Stainless Steel + Ultrahigh molecular weight polyethylene		1.5 + 0.25 (Polyethylene Thickness)

* Use FENB0.5 (See P.1206).

Angle Adjustable CSHWS CSHWE CSHWU

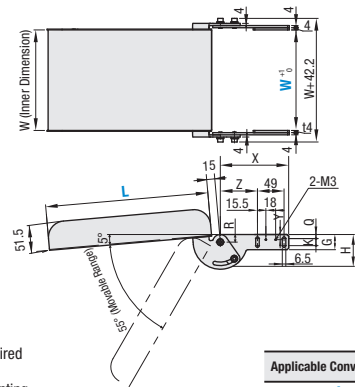

30° Angle-Fixed CSHYS CSHYE CSHYU

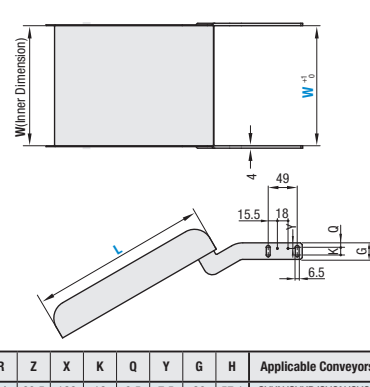

Applicable Conveyor Type	R	Z	X	K	Q	Y	G	H	Applicable Conveyors
A	14	68.5	126	13	9.5	7.5	28	57.1	SVKN/SVKR/CVGN/CVGP
B	14	98.5	156	13	9.5	7.5	28	57.1	CVGR/CVGW
C	24	83.5	141	30	10	10	48	75	CVSY/CVSX

- ① When L≥310, we recommend the alteration YNS (Welding Nut + Leg).
- ② When mounting to MISUMI conveyors, the W dimensions should be: Belt Width + 40 for Bracket Type A, B; Belt Width + 50 for C.
- ③ We will ship Angle Adjustable Types unassembled. Assembly will be required on your side. The 30° Angle-Fixed Types will be shipped assembled.
- ④ M5/M6 Hex Socket Head Cap Screws and Washers are included for mounting of the conveyor. You will choose either of them and the rest will be left unused.

Angle Adjustable

Part Number	Applicable Conveyors Types	W 1mm Increment	L 10mm Increment	Applicable Conveyors	Conveyor Page
CSHWS CSHWE CSHWU	A	90-540	70-500	SVKN/SVKR/CVGN/CVGP	P.1258 / 1260 / 1222 / 1224
	B	90-340		CVGR/CVGW	P.1226 / 1228
	C	150-550		CVSY/CVSX	P.1268 / 1266

30° Angle-Fixed

Part Number	Applicable Conveyors Types	W 1mm Increment	L 10mm Increment	Applicable Conveyors	Conveyor Page
CSHYS CSHYE CSHYU	A	90-540	70-500	SVKN/SVKR/CVGN/CVGP	P.1258 / 1260 / 1222 / 1224
	B	90-340		CVGR/CVGW	P.1226 / 1228
	C	150-550		CVSY/CVSX	P.1268 / 1266

W	L	Available Types					
		CSHWS	CSHWE	CSHWU	CSHYS	CSHYE	CSHYU
90-200	70-100	•	•	•	•	•	•
	110-200	•	•	•	•	•	•
	210-300	•	•	•	•	•	•
	310-400	•	•	•	•	•	•
201-300	410-500	•	•	•	•	•	•
	70-100	•	•	•	•	•	•
	110-200	•	•	•	•	•	•
	210-300	•	•	•	•	•	•
301-400	310-400	•	•	•	•	•	•
	410-500	•	•	•	•	•	•
	70-100	•	•	•	•	•	•
	110-200	•	•	•	•	•	•
401-550	210-300	•	•	•	•	•	•
	310-400	•	•	•	•	•	•
	410-500	•	•	•	•	•	•
	70-100	•	•	•	•	•	•

① W is 150- for the applicable conveyor type C.

Part Number Example
 Part Number - Applicable Conveyor Type - W - L
 CSHWE - A - 150 - 300

Part Number Alterations
 Part Number - Applicable Conveyor Type - W - L - (YN, YNS)
 CSHWE - A - 150 - 300 - YNS800

Alterations Code	Welded Nut	Welding Nut + Leg
	YN	YNS
Spec.	Alterations for M6 nuts on both ends of the chute side. This will enhance versatility of mounting. (HOLE) (M6X1.0) (1.5) Arrow View A	Alteration for legs to support loads. Configurable when W≥150, 200≤YNS≤1200. The product will be shipped unassembled and assembly will be required on your side. Ordering Code: YNS800 Configurable Range: 200 - 1200 (10 mm increment) Accessories 2 pcs of Hex Socket Head Cap Screws FFB1 W-35 FFB1 FFA28 YNS SCB6-10 FFB6 (146)


Angle Adjustment Bracket Single Article

For Adjusting Angle Bracket only

CSHR



RoHS 10

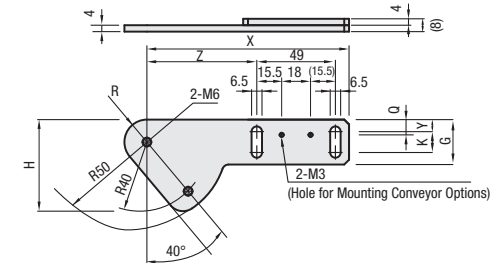

Material: 304 Stainless Steel

- ① Left and right units together makes 1 set.
- ② Right and left units are symmetrical.

Part Number		Applicable Conveyors	R	Z	X	K	Q	Y	G	H
Type	Applicable Conveyors Types									
CSHR	A	SVKN/SVKR/CVGN/CVGP	14	68.5	126	13	9.5	7.5	28	57.1
	B	CVGR/CVGW	14	98.5	156	13	9.5	7.5	28	57.1
	C	CVSY/CVSX	24	83.5	141	30	10	10	48	75

Part Number Example
 Part Number
 Type Applicable Conveyor Type
 CSHRA

Application Example

