## **Slot Pins for Inspection Jigs**

## Clamp Type, Diamond / Round Straight / Clamp Type, Diamond / Round Taper

Feature: Suitable when clamping workpieces by turning the collar to measure the dimensions. Diamond and Round shapes are available depending on the work shape. Applicable Bushings: refer to P.1828-1830, 1834

# Slot Pins for Inspection Jigs – Clamp Type, Diamond / Round Straight

RoHS10

Туре

Diamon


**KJPCS** 

**KJPCSH** 


Round


**KJPCMS** 

K.IPCMS

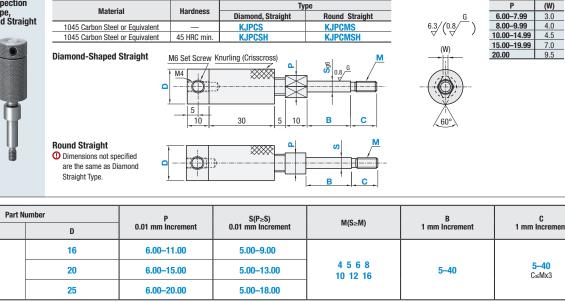

Туре

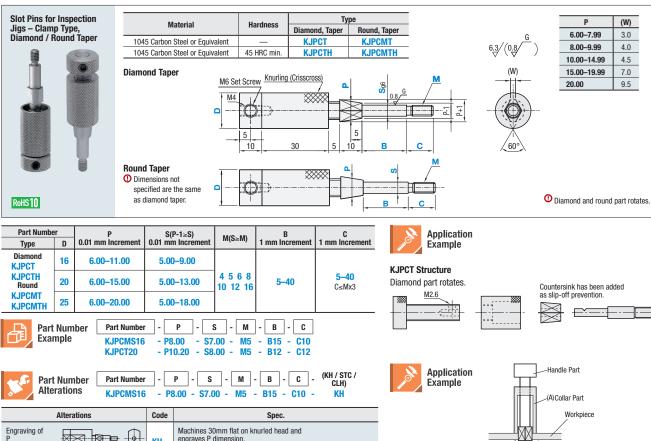

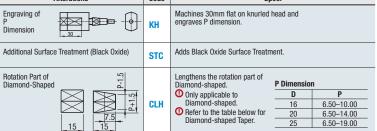

There's more on the web: misumiusa.com

Diamond and round part rotates.


(A) Collar lowers to clamp the work piece.

Fixture

Р

# GO / NO-GO Pins / Slot Pins for Inspection Jigs

**Reversible / with Groove** 

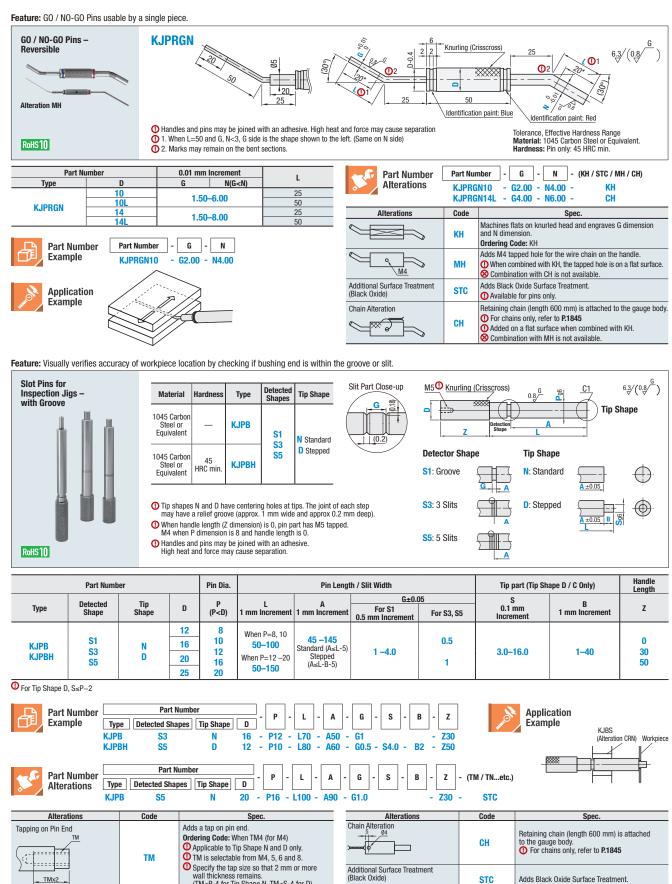

| Alterations        | Code | Spec.   | Alter            |
|--------------------|------|---|------------------|
| Tapping on Pin End | тм   | Adds a tap on pin end.<br>Ordering Code: When TM4 (for M4)<br>① Applicable to Tip Shape N and D only.<br>① TM is selectable from M4, 5, 6 and 8.<br>③ Specify the tap size so that 2 mm or more wall thickness remains.<br>(TM≤P-4 for Tip Shape N, TM≤S-4 for D) | Chain Alteration |

1826

Check out misumiusa.com for the most current pricing and lead time.

|             |            | Tip part (Tip Shape D / C Only) |                | Handle<br>Length |  |  |
|-------------|------------|---------------------------------|----------------|------------------|--|--|
| G±0.05      |            | S                               | P              |                  |  |  |
| 1<br>rement | For S3, S5 | 0.1 mm<br>Increment             | 1 mm Increment | Z                |  |  |
| 0           | 0.5<br>1   | 3.0–16.0                        | 1–40           | 0<br>30<br>50    |  |  |