


BLADES FOR SLIDE TYPE AIR NIPPERS

shows in red



MNY□□ (For horizontal slide)

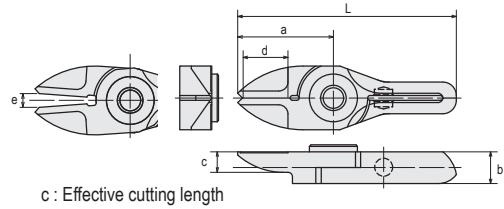

How to read part number

No. **MNY10 A J**

Body No.

Cutting edge


A : Double (regular)
RA : Double (reverse)

Shape

J : Straight blade
JL : Straight long blade
JT : Straight thin blade
D : Ridge for resin
JY : Straight corner blade
JB : with straight carbide tip
JH : with straight HSS tip
H : Crank


Shape

J: Straight blade




JL: Straight long blade

For when there is a distance between the gate and the nipper body




JT: Straight thin blade

The cross section of the blade is thin and produces a clean cut surface




JY: Straight corner blade

For when applicable gate is narrow and normal blade is too thick




D: Ridge for resin

For collective processing of three-dimensional gates such as ridge gates




JB: With straight carbide tip

For cutting hard steel wires and resin containing a large amount of glass fiber




JH: With straight HSS tip

For cutting piano wires and when ordinary special alloy steel has insufficient durability



H: Crank

Prevents interference between the product and main body



For Horizontal Slide (Regular blade/Reverse blade)

Applicable models	Cutting capacity φ (mm)		a	b	c	e	Weight (g)	Part Number			Unit Price
	Soft resin	Hard resin						Body No.	Cutting edge	Shape	
MGT—NY03G	2.0	1.3	21.0	7.0	10.5	3.0	17.0	MNY03	A	J	1-9 pcs
	1.6	1.1	27.0	7.0	10.5	4.0	21.0		A	JL	
	2.0	1.3	21.0	7.0	10.5	3.0	17.0		A	JT	
MGT—NY03GR	2.0	1.3	21.0	7.0	10.5	3.0	17.0	MNY03	RA	J	
MGT—NY05 MGT—NY05—4 MGT—NF05	3.0	2.0	22.0	7.0	10.5	4.0	22.0	MNY05	A	J	
	2.8	1.6	31.0	7.0	10.5	5.5	29.0		A	JL	
	3.0	2.0	22.0	7.0	10.5	4.0	22.0		A	JB	
	3.0	2.0	22.0	7.0	10.5	4.0	21.0		A	JT	
	3.0	2.0	31.0	19.0	10.5	5.5	37.0		A	H	
MGT—NY05R MGT—NY05R—4	3.0	2.0	22.0	7.0	10.5	4.0	22.0	MNY05	RA	J	
	3.0	2.0	30.0	12.0	10.5	5.0	31.0		RA	H	
MGT—NY10 MGT—NY10—4 MGT—NY10G MGT—NY10S MGT—NF10	3.5	2.3	24.0	7.2	12.0	6.0	28.0	MNY10	A	J	Quotation
	3.2	2.1	33.0	7.2	12.0	8.0	37.0		A	JL	
	2.3	1.6	26.5	7.2	d1 4.2 d2 2.5	6.0	31.0		A	D	
	3.5	2.3	24.0	7.2	12.0	6.0	28.0		A	JB	
	3.5	2.3	24.0	7.2	12.0	6.0	26.0		A	JT	
	3.5	2.3	33.0	20.0	12.0	8.0	43.0		A	H	
MGT—NY10R MGT—NY10R—4 MGT—NY10GR	3.5	2.3	24.0	7.2	12.0	6.0	28.0	MNY10	RA	J	
	3.5	2.3	32.0	12.2	12.0	7.0	36.0		RA	H	
MGT—NY15 MGT—NY15—4 MGT—NF15	4.0	2.6	27.0	8.2	13.0	8.0	41.0	MNY15	A	J	
	3.7	2.3	38.0	8.2	13.0	11.0	50.0		A	JL	
	2.6	2.2	30.0	8.2	d1 4.7 d2 3.0	8.0	45.0		A	D	
	4.0	2.6	27.0	8.2	13.0	8.0	41.0		A	JB	
	4.0	2.6	27.0	8.2	13.0	8.0	38.0		A	JT	
	4.0	2.6	38.0	21.5	13.0	11.0	63.0		A	H	
MGT—NY15 MGT—NY15—4	4.0	2.6	27.0	8.2	13.0	8.0	41.0	MNY15	RA	J	
	4.0	2.6	35.0	13.2	13.0	9.0	52.0		RA	H	
MGT—NY25 MGT—NY25—6 MGT—NY25S	5.0	3.4	6.0	10.0	16.0	9.0	65.0	MNY25	A	J	
	4.7	3.0	46.0	10.0	16.0	13.0	88.0		A	JL	
	3.3	2.0	35.0	10.0	d1 4.0 d2 6.0	9.0	75.0		A	D	
	5.0	3.4	31.0	10.0	16.0	9.0	65.0		A	JB	
	546	3.4	46.0	6.0	17.0	13.0	110.0		A	H	
MGT—NY25R MGT—NY25R—6	5.0	3.4	31.0	10.0	16.0	9.0	65.0	MNY25	RA	J	
	5.0	3.4	42.0	6.0	16.0	12.0	89.0		RA	H	

*Note that there are a regular blade and a reverse blade. Horizontal type cannot be used for both regular blade and reverse blade.



Order

Part Number

MNT10AJ
MNT10AJH



Days to Ship

Quotation




Price

Quotation


* The capacity is a reference guideline. It depends on the usage conditions.

For quantities not displayed here, refer to our MISUMI website for more information.

shows in red



MNT□□ (For vertical slide)

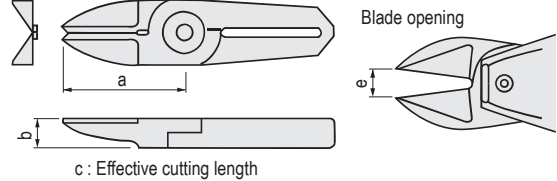


c : Effective cutting length

How to read part number
No. **MNT10 A J**

Body No.	Cutting edge	Shape
	A : Double (regular)	J : Straight blade
	RA : Double (reverse)	JL : Straight long blade
		JT : Straight thin blade
		D : Ridge for resin
		JY : Straight corner blade
		JB : with straight carbide tip
		JH : with straight HSS tip
		H : Crank


■ Shape

J: Straight blade




JL: Straight long blade

For when there is a distance between the gate and the nipper body




JT: Straight thin blade

The cross section of the blade is thin and produces a clean cut surface




JY: Straight corner blade

For when applicable gate is narrow and normal blade is too thick




D: Ridge for resin

For collective processing of three-dimensional gates such as rideup gates




JB: With straight carbide tip

For cutting hard steel wires and resin containing a large amount of glass fiber




JH: With straight HSS tip

For cutting piano wires and when ordinary special alloy steel has insufficient durability




H: Crank

Prevents interference between the product and main body



E: Disposable gate treatment

Use for processing plastic gates such as ride gates and discard gates.



■ For Vertical Slide (Regular blade/Reverse blade)

Applicable Models	Cutting capacity φ (mm)		a	b	c	e	Weight (g)	Part Number			Unit Price 1~9 pcs	
	Soft resin	Hard resin						Body No.	Cutting edge	Shape		
MGT-NT03	1.5	1	24	7	11	3	20	MNT03	A	J		
MGT-NT03R	1.5	1	24	7	11	3	19		A	JT		
MGT-NT03-4	1.5	1	24	7.0	11	3	19		A	JY		
MGT-NT03R-4	1.5	1	24	b1 4.5	11	3	19					
MGT-NT05	2.5	1.5	29	7	15	6	30	MNT05	A	J		
	2	1.3	36	7	15	7	39		A	JL		
	2.5	1.5	29	7	15	6	30		A	JB		
	2.5	1.5	29	7	15	6	29		A	JT		
	2.5	1.5	29	7.0	15	6	29		A	JY		
	MGT-NT05R	2.5	1.5	29	b1 4.0	15	6		29	A	D	
	MGT-NT05-4	2.5	1.2	31.5	7	d1 3.5	6		37	A	JH	
MGT-NT05R-4	2.5	1.5	29	7	d2 2.5	6	30	A	JH			
MGT-NT10	2.5	1.3	29	7.0	7	6	36	MNT10	A	E		
	3.5	2.3	35	9	17	7	62		A	J		
	3	2	47	9	17	9	62		A	JL		
	3.5	2.3	35	9	17	7	76		A	JB		
	3.5	2.3	35	9	17	7	65		A	JT		
	3.5	2.3	35	9.0	17	7	82		A	JY		
	MGT-NT10R	3.5	2.3	35	b1 5.0	17	7		82	A	JY	
MGT-NT10-6	3.5	2.1	39	9	d1 5	7	65	A	D			
MGT-NT10R-6	3.5	2.3	35	9	d2 4.0	7	65	A	JH			
MGT-NT20	3.5	2.1	35	9.0	9	7	75	MNT20	A	E		
	5	3.4	40	12	6	9	120		A	J		
	4.5	3.2	57	12	6	12	156		A	JL		
	5	3.4	40	12	6	9	120		A	JB		
	MGT-NT20R	5	3.4	40	12	6	9		120	A	JB	
MGT-NT20-6	5	2	46	12	d1 6.0	9	141	A	D			
MGT-NT20R-6	5	3.4	40	12	d2 7.0	9	141	A	JH			

Quotation

For quantities not displayed here, refer to our MISUMI website for more information.



Order

Part Number

MNT10AJ
MNT10AJH



Days to Ship

Quotation



Price

Quotation